


CUPLAS

Ø NOMINAL	ROSCA	RANGO DE PRESION ESTATICA		TIPO DE ROSCA	L	E
		psi	kg/cm ²			
pulgadas	pulgadas				mm	mm
2	2 3/8	300 A 500	21 A 35	8 h/pulg.	173	65
		650 A 800	45.7 A 56			
		1000 A 1500	70 A 105			
		2000 A 2500 3000	140 A 175 210			
2 1/2	2 7/8	300 A 500	21 A 35	8 h/pulg.	188	72
		650 A 800	45.7 A 56			
		1000 A 1500	70 A 105			
		2000 A 2500 3000	140 A 175 210			
3	3 1/2	300 A 500	21 A 35	8 h/pulg.	201	79
		650 A 800	45.7 A 56			
		1000 A 1500	70 A 105			
		2000 A 2500 3000	140 A 175 210			
4	4 1/2	300 A 500	21 A 35	8 h/pulg.	213	86
		650 A 800	45.7 A 56			
		1000 A 1500	70 A 105			
		2000 A 2500 3000	140 A 175 210			
6	7	300 A 500	21 A 35	8 h/pulg.	206	80
		300 A 500	21 A 35	2 h/ pulg.	267	100
		650 A 800	45.7 A 56	8 h/pulg.	206	80
		650 A 800	45.7 A 56	2 h/ pulg.	267	100
		1000 A 1500	70 A 105	8 h/pulg.	206	80
		1000 A 1500	70 A 105	2 h/pulg.	267	100
		2000 A 2500	140 A 175	2 h/pulg.	267	100
		2000 A 2500	140 A 175	2 h/pulg.	267	100
8	9	300 a 500	21 A 35	2 h/pulg.	331	115
		650 A 800	45.7 A 56			
		1000 a 1500	70 A 105			
		2000	140.00			
10	11 1/2	300 a 500	21 A 35	2 h/pulg.	350	139
		650 A 800	45.7 A 56			
		1000 a 1250	70 A 105			
12	13 1/4	300 a 500	21 A 35	2 h/pulg.	420	170
		650 A 800	45.7 A 56			
		1000 a 1250	35 A 87.5			
14	15	300 a 500	21 A 35	2 h/pulg.	450	190
		650 A 800	45.7 A 56			
		1000	35 A 87.5			

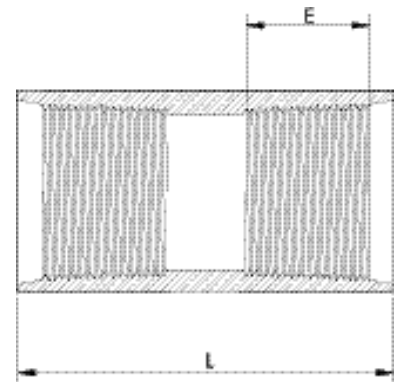

PIEZAS ESPECIALES POR PEDIDO

Bushings • Swages
Adaptador de rosca

